
One Vision, Two Sharp Eyes with Our Innovation

SP-100 Handy Pachymeter

New Compact Pachymeter with Multiple Functions



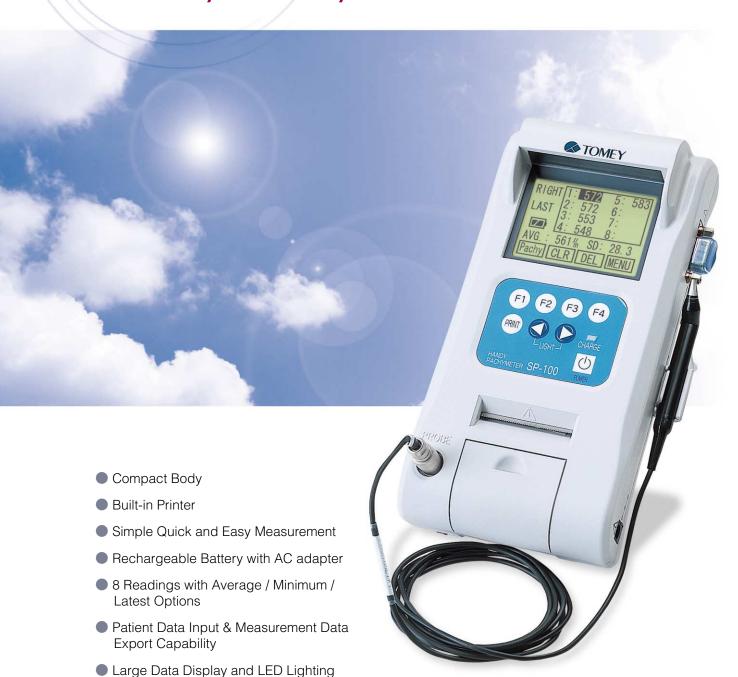

IOP Calculations,

corrected by Center Corneal Thickness

One Vision, Two Sharp Eyes with Our Innovation

SP-100 Handy Pachymeter




- Compact Body
- Built-in Printer
- Simple, Quick and Easy Measurement
- Rechargeable Battery with AC adapter
- 8 Readings with Average / Minimum / Latest Options
- Patient Data Input & Measurement Data Export Capability
- Large Data Display and LED Lighting
- IOP Calculations, corrected by Center Corneal Thickness

Not too small, Not too BIG... It's the size you need!

A simple Handy Pachymeter is what you want and Tomey delivers. The SP-100 Handy Pachymeter is only 530g (19 oz.) and is the best equipment to measure Central Corneal Thickness. The Tomey Tone-Assisted Measurement System will allow measurements without looking at the display. 2.7" Dot Matrix LCD provides easy-to-read information. Thermal built-in printer and RS-232C communication port make for quick recording and easy data output possible. The unit just fits in your hand. Unlike the pen style which is easily lost, our pachymeter is comfortably held with one hand and is more portable than the larger models. The built-in rechargeable battery enables wireless operation. Our easy-to-read print out includes the patient ID, name and measured date.


If you don't have a pachymeter, the SP-100 is the only one you need. If you already have one, the SP-100 is the best pachymeter as a second unit.



Easy Measurement with Simple



Large Measurement Data



IOP Calculations



Operating Panel (Buttons & Indicator)

2004/ 9/24 16:30 ID:12345678901234 NAME ABCDEFGHIJKLMN			
Vel:1			age
RIGHT 1: 54	8	2:	
3: 55 5: 58	-	4:	548
Avg:	561	SD:2	28. 3
LEFT 1: 82		2:	830
3: 82 Avg:	-	SD:	2. 9

Sample Printout

SP-100 **SPECIFICATIONS**

Pachymeter Functions

Ultrasound Frequency $20MHz \pm 20\%$ Velocity Range 1.400 - 2.000 m/sDefault Setting 1,640m/s

Measurement Range $150 - 1,200 \mu m$ **Measurement Accuracy** ± 5.0μm Minimum Display Unit

Main Body

STN 2.7" Dot Matrix LCD Display

Ultrasound Energy

Less than 17mW/cm2 Ispta3 Isppa3 Less than 28mW/cm2 MI Less than 0.23 **Dimensions** 118mm (W) x 207mm (D) x 59mm (H) 4.6'' (W) x 8.1'' (D) x 2.4'' (H)

Weight **Power Sources**

Voltage Range Frequency 50/60Hz

Power Consumption

Battery

AC 100-120 V or 200 - 240 V

23VA + less than 15%

530g (1.17 lbs.)

Lithium Ion Rechargeable Battery Up to 4 hours continuous use



Tomey Corporation [Asia-Pacific]

2-11-33 Noritakeshinmachi Nishi-Ku, Nagoya, 451-0051, Japan Tel: ++81-52-581-5327 Fax: ++81-52-561-4735

For more information, visit our web site

E-Mail: intl@tomey.co.jp

Tomey GmbH [Europe]

Am Weichselgarten 19a D-91058 Erlangen-Tennenlohe, Germany Tel: ++49-9131-77710 Fax: ++49-9131-777120 E-Mail: info@tomey.de

http://www.tomey.com